



# INSTALLATION

## LUGGAGE RACK FOR GL 1800

## 7151

### PARTS INCLUDED

- 1 Luggage Rack with Rubber Insert
- 1 Hardware Kit Including:
  - 4 Cup washers
  - 2 Rubber Spacers with Adhesive Back
  - 8 Rubber washers
  - 2 #10-24 x 1"
  - 2 #10-24 x 1-1/4"
  - 4 Flat washer - 1/4" zinc
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

### TOOLS SUGGESTED

Set of Hex Wrenches, Drill and Drill Bits, Masking Tape, and a Marker or Pen

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

**STEP 2** Without letting the Luggage Rack contact the Trunk Lid, hold it in the approximate mounting location. Place masking tape on the top (painted) surface of the trunk lid in the location of the luggage rack legs to prevent scratching.

**CAUTION! MEASURE TWICE – DRILL ONCE.** Double check all reference marks made on the Trunk Lid **BEFORE** drilling. Kuryakyn will not be responsible for incidental or consequential damages resulting from this installation.

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
  - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
  - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

• Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.

-cont.-


7151-21GL-0911

kuryakyn.com




**STEP 3** Set the luggage rack in position on top of the tour box, with the legs resting on the masking taped areas. While holding the rack centered where you want it, trace the location of the legs on to the masking tape. Carefully mark the very center of your tracings.

**STEP 4** Double check to be certain the rack is centered in the position you desire. Carefully drill a 1/4" hole at the center of the marked locations **AT THE REAR OF THE TOUR BOX ONLY!!** (Hint: You may want to drill a smaller diameter pilot hole first. This will lessen the chance of the drill "walking" and harming the finish. While drilling the rear holes, try to match the angle of the rear mounting legs.) Each hole will penetrate the inner and outer surface of the tour box at the rear mounting points.

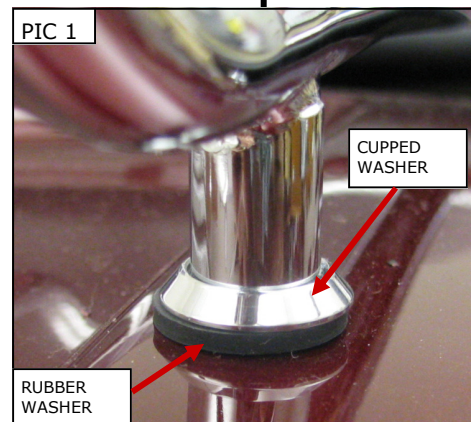

**STEP 5** Open the top of the tour box, and remove all fasteners that hold the inner surface of the box top in place. Remove the inner surface. Now drill the front two mounting holes as marked. Only the outer surface of the box will be drilled for the front two mounts. Remove the masking tape from around the front two holes. Mount the front half of the rack. The cupped washers will be inserted onto the feet of the luggage rack. The 10"-24 x 1" button head cap screws, one flat washer and two rubber washers will be used per bolt. A rubber washer will be placed on either side of the mounting surface and the metal washer next to the screw. Tighten these assemblies into the luggage racks front feet. **Do not over tighten the fasteners.** PIC 1 and FIG 1

**STEP 6** Mounting the rear half of the rack. Remove the masking tape from around the rear holes. One at a time, remove the adhesive backing from the spacers. On the inside of the top of the tour box affix the rubber spacers so their I.D.s are concentric with the I.D. of the holes you drilled in the top of the box.

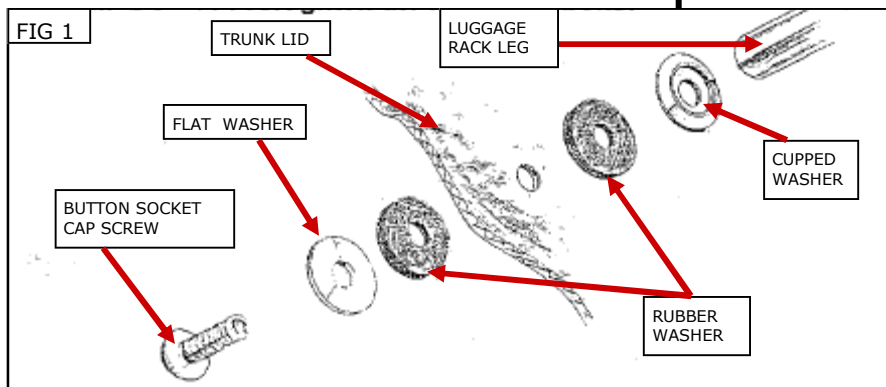

Reinstall the inner surface of the tour box in the same manner as it was removed. Mount the rear half of the rack in the same manner as you did with the front half, except the 10"-24 x 1-1/4" button head cap screws will be used here. Tighten the rear mounting bolts. **Do not over tighten the fasteners.**

**CAUTION!** Never exceed the manufacturer's recommended load capacity. Excess loading on the luggage rack could cause damage to your motorcycle, loss or injury. Küryakyn is not responsible for any damage, loss, or injury caused by exceeding the manufacturer's load capacity.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.