



UNIVERSAL ACCESSORY MOUNT 1474

WITH 1-1/4" CLAMP

FITS: UNIVERSAL FOR MOUNTING ON 1-1/4" HANDLEBARS AS WELL AS ENGINE GUARDS

PARTS INCLUDED

- 1 Mounting Plate Assembly
1 1-1/4" Handlebar Clamp
1 Universal Handlebar Accessory Mount Kit
2 3/4" x 2" Adhesive Foam Pads
1 8" x 1/2" Hook and Loop Strap
1 Anti-Seize Packet
1 Hardware Kit
2 Shims
1 Thumb Nut
1 5/16" Split Lock Washer
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KURYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE - Please note that all hardware included may not be used for installation

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

CAUTION! Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

NOTE The clamp may be fit with the pivot hole above or below the handlebar depending on clearance.

STEP 2 Remove the two screws in the handlebar clamp to separate the two halves.

CUSTOMER SERVICE 877.370.3604 (toll free)

INSTALLATION QUESTIONS techsupport@kuryakyn.com or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
• The product must be properly installed, maintained and operated under normal conditions.
• Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
• Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
• Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
• Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



STEP 3 Place the clamp halves around the 1-1/4" bar and secure with the two screws removed in STEP 2; add anti-seize to the screw threads and leave the screws finger tight for now.

ATTENTION! Determine the mounting location and orientation of the Drink Holder before fully tightening the two screws. The clamp may leave marks on the handlebar when tightened down.

STEP 4 As shown in PIC 1, insert the Accessory Mount into the clamp.

STEP 5 Place the included split lock-washer onto the protruding end of the threaded stud (PIC 1); ensure that the washer locates over the shoulder of the stud.

NOTE Put some of the included anti-seize on the threads of mounting stud.

STEP 6 Thread the included thumb nut onto the stud.

STEP 7 Adjust the Accessory Mount, tighten the thumb nut, and clamp screws.

STEP 8 Turn handlebars from side to side to check for proper clearance or any other obstructions.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

NOTE Use the included hook and loop strap to additionally secure the mounted device. See PIC 2.

NOTE The included adhesive foam can be used to fill excess space if your clip is loose and provide a soft mounting surface for your device. See PIC 3 and PIC 4.

NOTE Can be mounted on the top and or bottom of the handlebars for best rider positioning.

CAUTION! It is the installer's responsibility to ensure that there is adequate clearance between the Universal Accessory Mount with 1-1/4" Clamp and any painted surfaces. Kuryakyn is not responsible for any damage due to inadequate clearance.

CAUTION! Kuryakyn is not responsible for items that may be stolen or damaged in relation to the use of this product.

Ride On!


Kuryakyn[®]

PIC. 1




PIC. 2

Use the included hook and loop strap to additionally secure the mounted device.

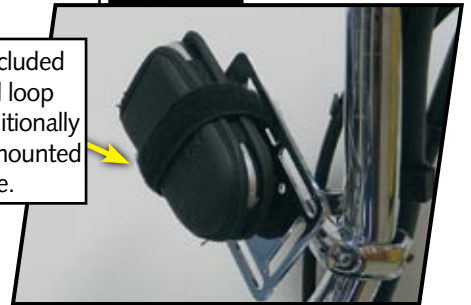

PIC. 3

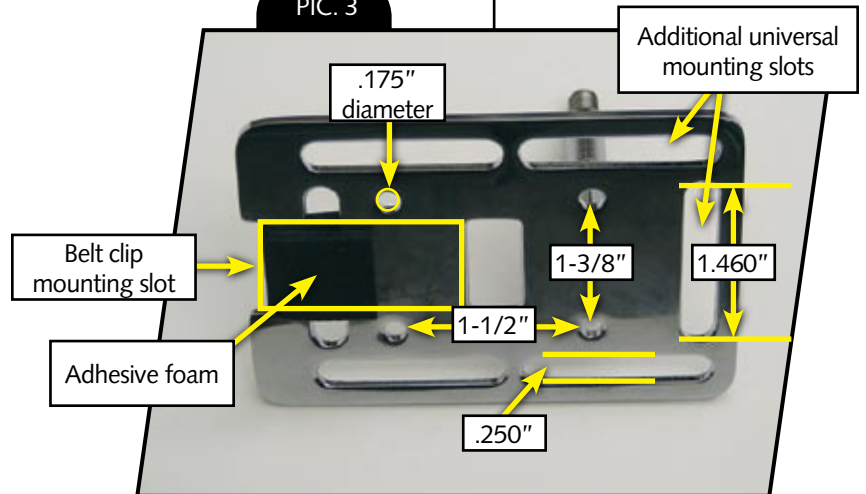

PIC. 1



PAGE

2