



## COMFORT DROP MOUNTS/MINI BOARDS for GL 1800 7564

### PARTS INCLUDED

- 1 Right Mini Board and Comfort Drop Mount—Black
- 1 Left Mini Board and Comfort Drop Mount—Black
- 1 Hardware Kit Containing:
  - 2 Cotter Pins
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.**

|                |  |
|----------------|--|
| <b>WARNING</b> | <b>THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.</b>             |
| <b>NOTICE</b>  | <b>This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.</b> |

|               |   |
|---------------|---|
| <b>NOTICE</b> | <b>IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.</b> |
|---------------|---|

### TOOLS SUGGESTED

Needle Nose Pliers, Set of Hex Wrenches


**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

**NOTE:** Pictures shown of Chrome parts. Installation of Black parts will be the same.

|                |   |
|----------------|---|
| <b>WARNING</b> | <b>YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.</b> |
|----------------|---|

**STEP 2** Determine the left from the right (sitting on bike) Drop Mount. PIC 1 The taller, sharp corner lip goes towards the front of the bike.

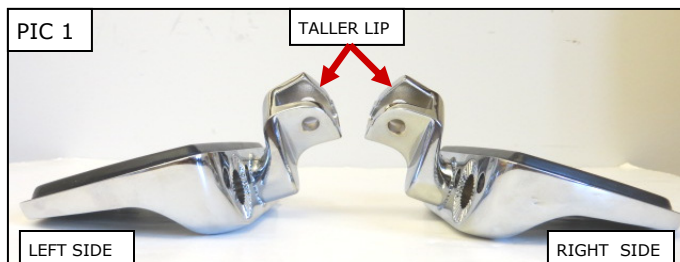

**CUSTOMER SERVICE**  
877.370.3604 (toll free)

**INSTALLATION QUESTIONS**  
techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
  - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



**STEP 3** Remove the stock pegs from the OEM mounts by removing the cotter pin and washer from the bottom of the mounting pin. PIC 2 Carefully remove the pin, watching how the spring is connected to the peg and the hole in the mount. PIC 3 Keep all these parts except the cotter pin, they will be reused.

**STEP 4** Reconnect the new Comfort Drop Mount and Mini Board to the mount, making sure that the spring is in the proper position. Drop the mounting pin back into position and secure with the OEM washer and included cotter pin. PIC 4 Check to make sure that your peg pivots up freely.

**WARNING** FOOTPEGS MUST BE INSTALLED SO THEY WILL FOLD UPWARD IF HIT BY ANY OBJECT. FAILURE TO ADJUST THE FOOTPEGS TO OPERATE IN THIS MANNER COULD RESULT IN SERIOUS INJURY OR DEATH.

**WARNING** DO NOT USE THE REARWARD MOUNTING HOLE IN THE MINI BOARDS. USING THIS POSITION WILL MOVE THE BOARD TOO FAR FORWARD AND MAY ALLOW YOUR FOOT TO BECOME LODGED BETWEEN THE BOARD AND THE SHIFT LEVER. THIS MAY CAUSE LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.

**NOTE:** If leaving the Mini Boards in the factory installed position on the Comfort Mount, tighten the socket head cap screw that attaches the Mini Board (PIC 5) to the Comfort Mount before riding the motorcycle.

**STEP 5** To change the position of the Mini Board rearward, remove the socket head cap screw that attaches the Mini Board to the splined adapter. PIC 5 Insert the socket head cap screw into the forward hole on the Mini Board and thread it into the splined adapter. Make sure the splines on the Mini Board are engaged on the splines on the adapter in the desired position and tighten securely.

**STEP 6** To change the tip-up or tip-down position of the Mini Boards, loosen the socket head cap screw far enough to allow the splines on the Mini Board and adapter to disengage. Move the Mini Board to the desired position, and making sure the splines on the board and adapter are engaged in that position, tighten the socket head cap screw securely.

**NOTE:** If the Mini Boards do not seem parallel after tightening in the desired orientation, they can be fine tuned by loosening the two footpeg mount fasteners and rotating the peg mount forward or backward to achieve the desired position. PIC 6

**WARNING** IT IS THE INSTALLERS RESPONSIBILITY TO ENSURE THERE IS SUFFICIENT CORNERING CLEARANCE BEFORE THE MOTORCYCLE IS RIDDEN. INSUFFICIENT CORNERING CLEARANCE MAY CAUSE LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.

**NOTICE** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

*Ride On!*

