



GEN 2 LEFT SIDE ACCESSORY MOUNT FOR GOLDWING DCT


- WARNING** This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.
- CAUTION** This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.
- ATTENTION** This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation. Read completely and understand the instructions prior to starting installation.

NOTE: Giro products are designed and manufactured under very strict quality control. Giro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a limited lifetime warranty against LED failure. Giro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed, unmodified and maintained. Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products. Please visit Ciro3d.com for our complete warranty policy.

Included Items:

- 1 Perch Mount Cap
- 1 #10-24 x 1/2" SHCS
- 1 Lock Washer
- 1 Left side Mount Base

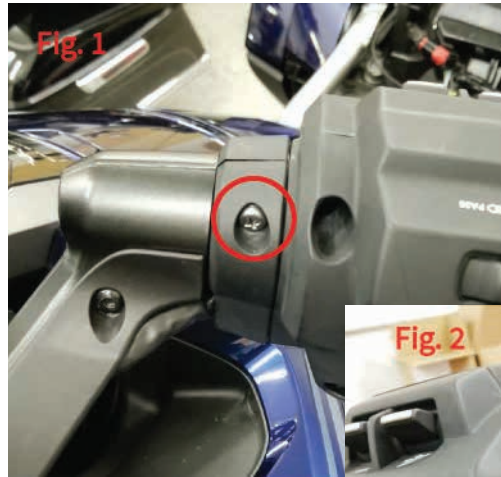

Installation Instructions:

1. Park on a level surface and shut off the motorcycle. Ensure that the engine has time to cool before installation. Cover your tank with a clean towel or blanket to protect it.
2. Remove the screw located on the front side of the bar and set aside. Carefully support the original clamp half and controls to prevent any accidental damage. Fig. 1
3. Install the perch cap to the mount with the included screw and lock washer. (See note below)
4. Hook the lower edge of the left side accessory mount to the detent in the control housing and lift up into place. Be sure the wire runs above the mount and is not pinched. Fig. 2
5. Use the screw removed in step 2 to secure the mount to your bar.
6. The position of the perch cap can be adjusted to provide adequate clearance for any installed accessory. Tighten to approximately 18-22 inch-lbs (2-2.5 N-m). Fig. 3

Note: Check accessory instructions for additional mounting details. We recommend periodically checking the tightness of all fasteners before riding. Adjustments may be made by carefully loosening hardware (including plastic collet nut) before moving items. Make sure to fully tighten everything before use. We recommend the use of a medium strength thread locker on screws.

