




## GOLDSTRIKE CALIPER COVERS

Parts Included:	1	Left caliper cover
	1	Right caliper cover
	2	Brackets
	2	Hardware Kit

### INSTALLATION INSTRUCTIONS:

1. Park on a level surface and shut off the motorcycle. Lift motorcycle onto its center stand if available. Ensure the engine has time to cool before installation.
2. Clean the left and right brake calipers with hot water and soap to remove all dirt and debris.
3. ATTENTION: Thoroughly clean the mounting surfaces with denatured alcohol to remove all wax, oil, and residue.  
NOTE: New motorcycles are delivered from the factory covered in protective oil. Remove it before installing this product.  
NOTE: Do not install if the temperature is below 50° F. The adhesive will not cure properly. (FIG.1)

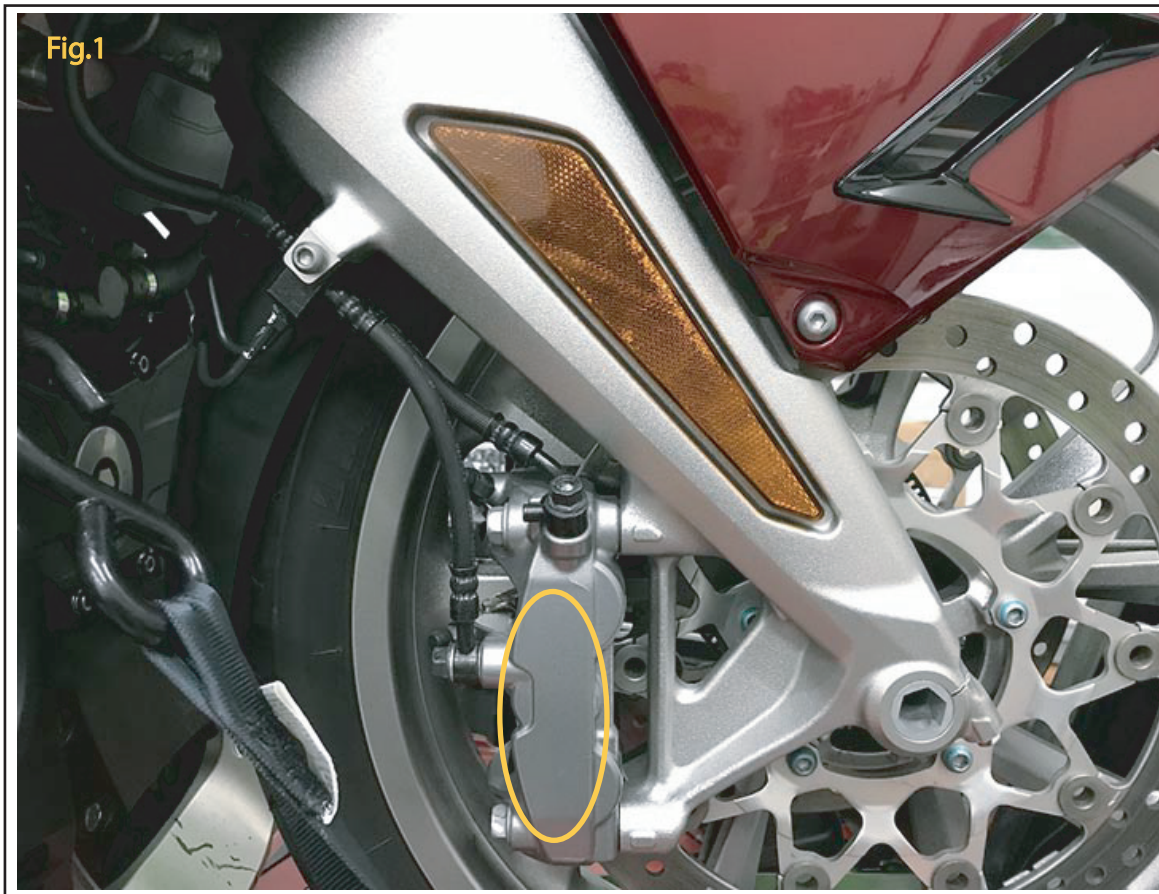

4. Test fit the bracket to familiarize yourself with its location. The bracket will fit easily over the caliper. (FIG.2)
5. Apply the adhesion promoter to both left and right calipers following the directions on the package. (FIG.1)
6. Peel off the adhesive liner from the back of the bracket and press it onto the brake caliper. (FIG.2)

### WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

### CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

### ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Ciro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

### NOTE:

Ciro products are designed and manufactured under very strict quality control. Ciro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a lifetime warranty against LED failure.

Ciro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Ciro will not be liable for any consequential and incidental damages, including labor, or non-Ciro products.

Please visit our website [Ciro3D.com](http://Ciro3D.com) for our complete warranty policy.



7. Test fit the cover and check clearances. (FIG.3)
8. Install the cover onto the bracket using the provided hardware. Torque the fasteners to 9 NM, 6.6 lbf-ft. (FIG.3)
9. Repeat above steps for opposite side of motorcycle.
10. For future service, removal is the reverse order as shown. The brackets will remain installed during brake caliper service.



NOTE: If you are installing this product alongside other Goldstrike accessories it may be necessary to loosen and adjust the hardware for best fit of all components. Be sure to tighten everything after any adjustment.