



## ERGO II WITH MINI ARMS & DUALY PEGS

### 4073

### PARTS INCLUDED

- 2 Mini Ergo Arm II
- 1 Left Dually Iso Peg W/ Clevis
- 1 Right Dually Iso Peg W/ Clevis
- 1 Left Ergo II Mount
- 1 Right Ergo II Mount
- 1 Hardware Kit including:
  - 2 Adjustable Stops for ERGO II
  - 2 1/2"-13 x 1-1/4" Button Head Cap Screws
  - 2 1/2" Wave Washer
  - 4 1/8" x 5/16" Roll Pin
  - 2 1/2"-13 x 3/4 Socket Head Cap Screw
  - 4 3/8"-16 x 5/8 Locking Set Screw
  - 1 Anti Seize
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**WARNING!** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

### TOOLS SUGGESTED

Set of Hex Wrenches, Socket Set with Ratchet

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

### STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

**WARNING!** YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

-cont.-

4073-22GL-0911

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
  - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
  - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge.

Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025.

Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.




**ATTENTION!** Use the supplied anti-seize for any chrome-to-chrome fasteners; this will prevent galling and make future removal of fasteners easier.

**Procedure for installing clamp and arm assembly on the engine guard**


**ATTENTION!** Mini Arms are suggested to be mounted above engine guard to avoid great reduction in cornering clearance.

**STEP 2** Locate the left (sitting on bike) mount; the mounts are side specific so be sure you have the correct mount before attempting the installation. Visually inspect the angle where the arm will be attached. The mount is angled slightly back, toward the rider, **NOT forward**. PIC 1

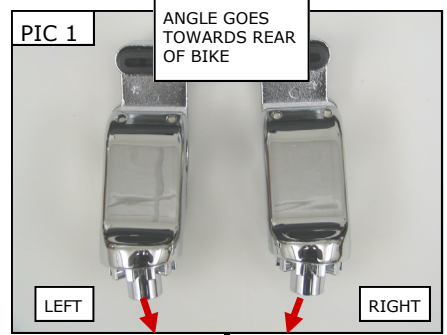


**STEP 3** Remove the four 1/4"-20 fasteners securing the mount together and separate the upper and lower halves.

**STEP 4** Insert the adjustable stop into the lower half of the mount. PIC 2 Install the mount and arm onto the engine guard; loosely secure with the four 1/4"-20 fasteners. Do not tighten at this time. PIC 3

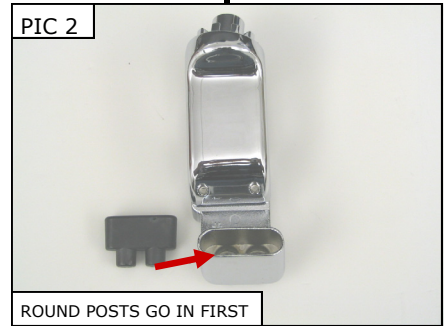

**STEP 5** Determine the desired angle of the foot peg using the positioning holes in the Mini Ergo Arm. Insert two roll pins into the mini ergo arm using the positioning holes. PIC 4

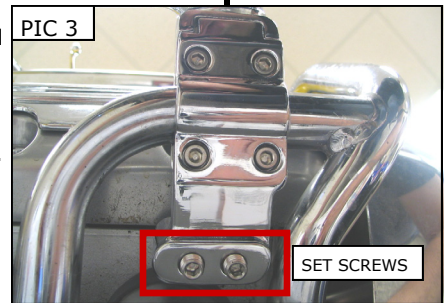

**STEP 6** Insert the 1/2"-13 x 1-1/4" Button Head Cap Screw through the Mini Ergo Arm and thread it into the clevis. The roll pins will be pressed into place as you tighten the clevis.


**STEP 7** Adjust the two setscrews below the adjustable stop to fine tune the foot peg angle. PIC 3

**STEP 8** Tighten the four fasteners on the bottom of the clamp; push down slightly on the foot peg while tightening the fasteners to take up any slack in the engine guard.

**STEP 9** Re-secure all fasteners. Repeat for the opposite side.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

**WARNING!** AVOID POTENTIAL SERIOUS OR FATAL INJURIES! ALWAYS POSITION THE MINI ARM EITHER LEVEL WITH, OR ABOVE, THE ENGINE GUARD. NEVER POSITION THE SWINGARM BELOW THE GUARD OR LOSS OF CORNERING CLEARANCE WILL RESULT POTENTIONALLY CAUSING LOSS OF CONTROL DURING CORNERING. IT IS THE INSTALLERS RESPONSIBILITY TO ENSURE THERE IS SUFFICIENT CORNERING CLEARANCE BEFORE RIDING.

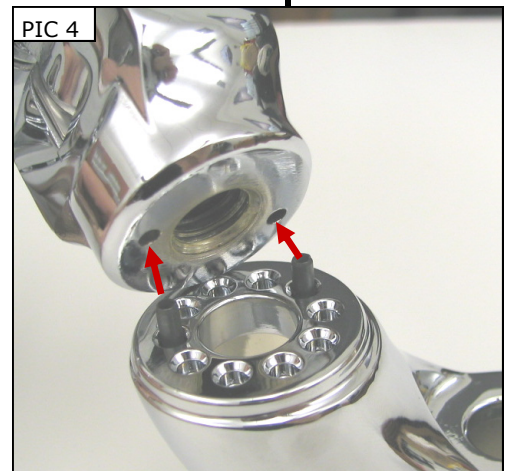

**CAUTION!** Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.